

夹紧圈橡胶塞棒

Rubber waterproof plug

LAND 蓝江


材料：三元乙丙/EPDM

防护：IP68


温度：-40℃~105℃

阻燃：UL94V-2（可定制V0级）

说明：SPR仅限单孔接头，SPM适用于单孔及多孔

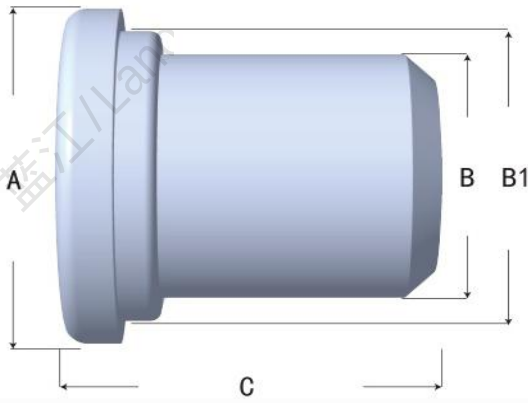

SPR型塞棒

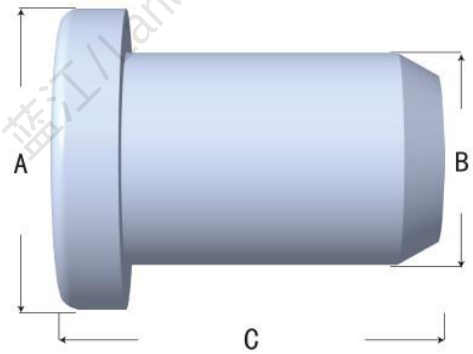

SPM橡胶塞棒

Material: EPDM

Protection: IP68

Temperature:- 40℃~105℃

Flame retardant: UL94V-2

Description: SPR is only applicable to single hole cable glands, SPM is suitable for single hole and multi hole cable glands

产品参数表/SPR

蓝江产品型号	产品尺寸/Product size				包装
Product model	A	B	B1	C	packing
PN.	Φ mm	Φ mm	Φ mm	L mm	Pcs/bag
SPR-055A	12	5.5	8.6	18	1000
SPR-070	13	7	10.5	18	1000
SPR-079	11	7.9	9	18	1000
SPR-092	15.5	9.2	12.5	18	1000
SPR-105	17	10.5	14.2	18	500
SPR-120	15.6	11.6	12.3	18	500
SPR-140	17	13.6	14.2	17.5	500
SPR-158	22	15.8	19	18	500
SPR-178	22	17.8	19	19	500
SPR-215	28	21.5	25	18	100
SPR-245	28	24.2	25	18	100
SPR-280	32	28.3	30	20.5	100
SPR-306	36	30.6	33	21	100
SPR-330	45	33.2	4	20	50
SPR-410	46	41	44	19.5	50

·产品参数表/SPM

蓝江产品型号	产品尺寸/Product size			包装
Product model	A	B	C	packing
PN.	Φ mm	Φ mm	L mm	Pcs/bag
SPM-025	4	2.5	14	1000
SPM-034	4.4	3.5	14	1000
SPM-050	6	5	15	1000
SPM-060	7.5	6.5	15.5	1000
SPM-070	8.5	7	15	1000
SPM-080	9.5	8	16	1000
SPM-100	11.5	10	15	1000

T型夹紧圈橡胶塞棒

T Rubber waterproof plug

材料：改性橡胶

颜色：黑色


防护：IP68

温度：-40°C~105°C

性能：耐油

说明：用于防水接头未穿线时堵孔，防水防尘

LAND 蓝江

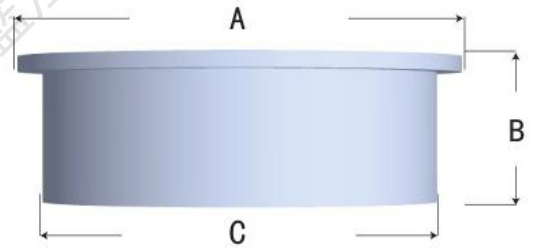

SPT橡胶塞棒

Material: Modified rubber

Colour: Black

Protection: IP68

Temperature:- 40°C~105°C

Performance: Oil resistant

Description: Used for waterproof and dustproof cable glands

产品参数表/SPT

蓝江产品型号	产品尺寸/Product size			包装
Product model	A	B	C	packing
PN.	Φ mm	Φ mm	L mm	Pcs/bag
SPT-2.5	3.5	5	2.5	1000
SPT-3.5	4.5	5	3.5	1000
SPT-5	6	5	5	1000
SPT-5.5	6.5	5	5.5	1000
SPT-6	7	5	6	1000
SPT-6.5	7.5	8	6.5	1000
SPT-7	8	5	7	1000
SPT-8	9.5	5	8	1000
SPT-9	10.5	5	9	1000
SPT-10	11.5	5	10	1000
SPT-12	13.5	6	12	500
SPT-14	15.5	6	14	500
SPT-16	17.5	9	16	500
SPT-18	19.5	9	18	500
SPT-21	23	10	21	500
SPT-22	24	10	22	500
SPT-23	25	10	23	500
SPT-25	27.5	10	25	500
SPT-27	29.5	10	27	500
SPT-30	32.5	10	30	500
SPT-31	35	10	31	500
SPT-32	36	10	32	500
SPT-36	40	10	36	500
SPT-37	41	10	37	500
SPT-38	41.5	10	38	100
SPT-41	45	10	41	100
SPT-44	47.5	10	44	100
SPT-53	57	12	53	100
SPT-57	61	12	57	100

T型夹紧圈不锈钢塞棒

Rubber waterproof stainless steel plug



材料：304不锈钢

温度：依据不锈钢特性

性能：耐腐蚀，耐油，耐酸碱，阻燃

说明：适用于防水接头未穿线时堵孔，防水防尘



Material: SUS304

Temperature: Based on the characteristics of stainless steel

Performance: Blocking holes for waterproofing and dust prevention

Description: Suitable for blocking holes when waterproof cable glands are not threaded, waterproof and dustproof

产品参数表/SPM-SS

蓝江产品型号	产品尺寸 / Product size				包装
Product model	A	B	C	L	packing
PN.	φ mm	φ mm	L mm	L mm	Pcs/bag
SPM-4-SS	6	4	10	12	100
SPM-6-SS	8	6	10	12	100
SPM-8-SS	10	8	10	12	100
SPM-10-SS	12	10	10	12	100
SPM-12-SS	14	12	10	12	100
SPM-14-SS	16	14	10	12	100
SPM-16-SS	18	16	10	12	100
SPM-18-SS	20	18	10	12	100
SPM-22-SS	24	22	10	12	100
SPM-25-SS	27	25	10	12	100
SPM-30-SS	30	30	10	12	50
SPM-32-SS	34	32	10	12	50
SPM-38-SS	40	38	10	12	50
SPM-40-SS	42	40	10	12	20
SPM-44-SS	46	44	10	12	20
SPM-50-SS	52	50	10	12	20

防尘塑料堵头

Dustproof plastic plug



材料：尼龙

温度：-40℃~105℃

性能：耐油，防尘，防水

说明：适用于防水接头未穿线时堵孔，防水防尘



Material: Nylon

Temperature: -40℃~105℃

Performance: Oil resistant, dustproof, waterproof

Description: Suitable for blocking holes when waterproof cable glands are not threaded, waterproof and dustproof

产品参数表/SPQ

蓝江产品型号	产品尺寸/Product size				包装
Product model	A	B	C	L	packing
PN.	Φ mm	Φ mm	L mm	L mm	Pcs/bag
SPQ-6	9.3	6	5	6.2	1000
SPQ-8	10	8	10	13.6	1000
SPQ-10	12.7	10	10	14	1000
SPQ-12	14.8	12	10	14.5	500
SPQ-14	16	14	10	15	500
SPQ-18	21	18	10	16	500
SPQ-25	28	25	14	21	500
SPQ-31	36	31	17	28	100
SPQ-32	37	32	17	28	100
SPQ-38	42.4	38	18	33	100
SPQ-41	45	41	16	29	50
SPQ-44	48	44	17	30	50
SPQ-45	48	45	17	30	50
SPQ-51	55	51	17	30	50

单孔防水密封圈

Waterproof sealing ring

材料: 三元乙丙/尼龙

颜色: 黑色

结构: 单孔型

温度: -40°C~100°C

说明: 外形美观, 尼龙与EPDM相契合, 适配蓝江品牌分体类格兰头, 锁紧密封电缆, 并且防护等级可达IP68

订购: 本产品仅承诺蓝江品牌产品适配, 不代表其他品牌可以配套使用, 请知悉

LAND 蓝江



Material: EPDM/Nylon

Color: Black

Structure: Single hole type

Temperature:- 40°C~100°C

Description: Beautiful appearance, compatible with nylon and EPDM Land brand split type gland head, locked and sealed cable, and The protection level can reach IP68

Order: This product only promises to be compatible with Blue River brand products and does not represent compatibility with other brands. Please be aware

产品尺寸表

蓝江产品型号	产品尺寸/Product size			整袋包装
Product Model	Φ A	Φ B	L	packing
PN.	Φ mm	Φ mm	mm	Pcs/bag
QM10-06B	10.2±0.5	6.7±0.5	14.1±0.5	1000
QM12-08B	12.1±0.5	8±0.5	16±0.5	1000
QM12-05B	12.1±0.5	5.5±0.5	16.5±0.5	1000
QM16-10B	16±0.5	10±0.5	19.5±0.5	1000
QM16-07B	16±0.5	7±0.5	20.5±0.5	1000
QM20-14B	20±0.5	14±0.5	22±0.5	500
QM20S-12B	18±0.5	12±0.5	20.5±0.5	500
QM20S-09B	18±0.5	9±0.5	20.5±0.5	500
QMG25-18B	25.5±0.5	18±0.5	23±0.5	200
QMG25-16B	25.5±0.5	16±0.5	23±0.5	200
QMG32-25B	33±0.5	25±0.5	24±0.5	100
QMG32-22B	33±0.5	22±0.5	24±0.5	100
QMG40-31B	41.5±1	32±1	31.8±1	50
QMG40-25B	41.5±1	25±1	31.8±1	50
QMG50-41B	51±1	41±1	35±1	50
QMG50-33B	51±1	32±1	35±1	50
QMG63-51B	66±1	53±1	38±1	50
QMG63-46B	66±1	46±1	38±1	50
QM63S-44B	56±1	44±1	38±1	50
QMG75-66B	78±2	66±2	42±2	10
QMG75-60B	78±2	60±2	42±2	10
QMG75-58B	78±2	58±2	42±2	10
QMG90-77B	95±2	80±2	45±2	10
QMG90-68B	95	68±2	45±2	10

防水多孔密封圈

Waterproof sealing ring

材料：三元乙丙/尼龙

颜色：黑色

结构：多孔型

温度：-40℃~100℃

说明：外形美观，尼龙与EPDM相契合，适配蓝江品牌分体类格兰头，锁紧密封电缆，并且防护等级可达IP68

订购：本产品仅承诺蓝江品牌产品适配，不代表其他品牌可以配套使用，请知悉



Material: EPDM/Nylon

Color: Black

Structure: Single hole type

Temperature:- 40℃~100℃

Description: Beautiful appearance, compatible with nylon and EPDM Land brand split type gland head, locked and sealed cable, and The protection level can reach IP68

Order: This product only promises to be compatible with Blue River brand products and does not represent compatibility with other brands. Please be aware

产品尺寸表

蓝江产品型号	适配蓝江接头	电缆范围	整袋包装
Product model	Adapt cable gland	Cable range	packaging
PN.	Metric	Φ mm	PCS
QM12-H2-03	M12×1.5	1.5~3	50
QM12-H3-02	M12×1.5	1~2.6	50
QM12-H4-02	M12×1.5	1~2.3	50
QM16-H2-02	M16×1.5	1.5~2.6	50
QM16-H2-04	M16×1.5	2~4	50
QM16-H3-03	M16×1.5	1.5~3	50
QM16-H3-04	M16×1.5	2~4	50
QM16-H4-03	M16×1.5	1.5~3	50
QM16-H6-02	M16×1.5	1~2.1	50
QM16-H8-02	M16×1.5	1~2.1	50
QM20S-H2-05	M20×1.5	2~5	50
QM20S-H3-05	M20×1.5	2~5	50
QM20S-H4-04	M20×1.5	2~4	50
QM20-H2-03	M20×1.5	1.5~3	50
QM20-H2-04	M20×1.5	2~4	50
QM20-H2-05	M20×1.5	2~5	50
QM20-H2-06	M20×1.5	3~6	50
QM20-H3-03	M20×1.5	1.5~3	50
QM20-H3-05	M20×1.5	2~5	50
QM20-H3-06	M20×1.5	3~6	50
QM20-H4-03	M20×1.5	1~2.5	50
QM20-H4-04	M20×1.5	1.5~3.5	50
QM20-H4-05	M20×1.5	2~4.5	50
QM20-H5-03	M20×1.5	1.5~3	50
QM20-H5-04	M20×1.5	2~4	50
QM20-H6-03	M20×1.5	2~3.5	50
QM20-H6-04	M20×1.5	2~4	50
QM25-H2-05	M25×1.5	3~5.5	50
QM25-H2-06	M25×1.5	3~6	50
QM25-H2-08	M25×1.5	5~8	50
QM25-H3-05	M25×1.5	2~5	50
QM25-H3-06	M25×1.5	3~6	50
QM25-H3-07	M25×1.5	4~7	50

QM25-H3-08	M25×1.5	5~8	50
QM25-H4-05	M25×1.5	2~5	50
QM25-H4-06	M25×1.5	3~6	50
QM25-H4-07	M25×1.5	4~7	50
QM25-H4-08	M25×1.5	5~8	50
QM25-H5-05	M25×1.5	3~5	50
QM25-H5-06	M25×1.5	4~6	50
QM25-H6-05	M25×1.5	3~5	50
QM25-H7-04	M25×1.5	2~4	50
QM25-H8-04	M25×1.5	2~4	50
QM32-H2-10	M32×1.5	6~10	20
QM32-H2-12	M32×1.5	9~12	20
QM32-H3-10	M32×1.5	6~10	20
QM32-H4-07	M32×1.5	4~7	20
QM32-H4-09	M32×1.5	6~9	20
QM32-H5-08	M32×1.5	5~8	20
QM32-H6-05	M32×1.5	3~5	20
QM32-H6-07	M32×1.5	4~7	20
QM32-H7-06	M32×1.5	4~6	20
QM32-H8-05	M32×1.5	3~5	20
QM40-H2-13	M40×1.5	9~13	10
QM40-H3-11	M40×1.5	8~11	10
QM40-H3-13	M40×1.5	10~13	10
QM40-H3-14	M40×1.5	11~14	10
QM40-H4-11	M40×1.5	8~11	10
QM40-H4-12	M40×1.5	9~12	10
QM40-H5-08	M40×1.5	5~8	10
QM40-H6-08	M40×1.5	5~8	10
QM40-H7-08	M40×1.5	5~8	10
QM40-H8-06	M40×1.5	4~6	10
QM40-H9-05	M40×1.5	3~5	10
QM40-H10-05	M40×1.5	3~5	10
QM50-H2-15	M50×1.5	11~15	10
QM50-H3-12	M50×1.5	9~12	10
QM63-H2-17	M63×1.5	14~17	10
QM63-H3-13	M63×1.5	9~13	10
QM63-H6-12	M63×1.5	8~12	10

防水扁孔密封圈

Waterproof flat hole sealing ring



材料：三元乙丙/尼龙

温度：-40℃~100℃

说明：用于蓝江防水接头锁紧密封扁电缆

Material: EPDM/Nylon

Temperature:- 40℃~100℃

Description: Used for locking and sealing cables of Lanjiang waterproof flat gland

产品尺寸表

蓝江产品型号	适配蓝江接头	电缆范围	包装
Product model	Adapt cable gland	Cable range	packaging
PN.	Metric	Φ mm	PCS
MG20A-0814	M20×1.5	8*14	50
MG20A-0612	M20×1.5	6*12	50
MG20A-0410	M20×1.5	4*10	50
MG20AS-0712	M20×1.5	7*12	50
MG20AS-0508	M20×1.5	5*8	50
MG25A-0511	M25×1.5	5*11	50
MG25A-0614	M25×1.5	7*14	50
MG32A-0519	M32×1.5	5*9	20
MG40A-1230	M40×1.5	12*30	10
MG50A-1334	M50×1.5	12*34	10
MG63A-1642	M63×1.5	10*42	10
MG63A-2055	M63×1.5	20*55	10

防水密封扁垫片

Waterproof sealing flat gasket


材料：三元乙丙/尼龙

温度：-40℃~100℃

Material: EPDM/Nylon

Temperature:- 40℃~100℃

产品尺寸表

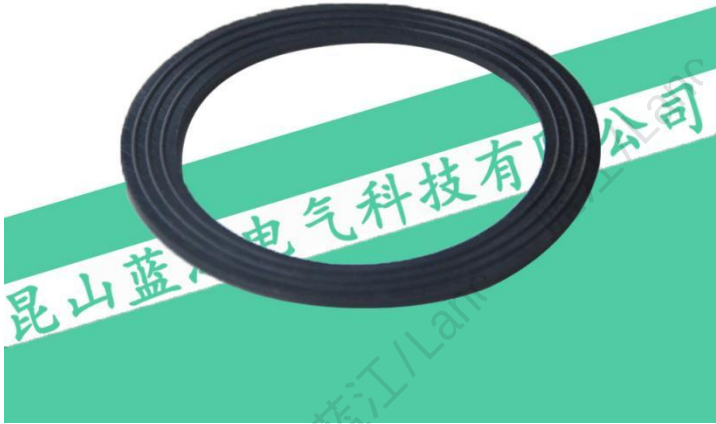

蓝江产品型号	产品尺寸/Product size		
Product model	内径	外径	厚度
PN.	Inner diameter	Outer diameter	Thickness
W-M8B	8	11	1.2
W-M10B	10	14.5	1.9
W-M12B	12	16	1.8
W-M16	16	20	1.5
W-M18	18	24	1.9
W-M20	20	28	1.8
W-M22	22	29	1.9
W-M25	25	34	1.9
W-M32	32	44	1.8
W-M36	36	45	2
W-M40	40	52	2
W-M50	50	64	2
W-M63	63	71	2
W-M75	75	91	2
W-M90	90	106	2
W-PG7	12.5	16	2
W-PG9	15.2	20	1.5
W-PG11	18.6	24	1.8
W-PG13.5	20.4	27	1.7
W-PG16	22.5	29	1.8
W-PG19	24	28	2
W-PG21	28.3	35	1.9
W-PG25	30	37	1.8
W-PG29	37	35	2
W-PG36	47	54	2
W-PG42	54	64	2
W-PG48	59.3	69	2

封口橡胶护套

Sealing rubber sheath

材料: PVC

温度: -20℃~80℃

说明: 包裹并保护电缆接头

Material: PVC

Temperature:- 20℃~80℃

Description: Wrap and protect cable gland



产品尺寸表

蓝江产品型号	产品尺寸/Product size			
Product model	总长度	接入长度	内径	厚度
PN.	L1 mm	L2 mm	Φ A mm	T mm
*PVC-Φ 20	80±2	50±2	20±2	1
PVC-Φ 24	98±2	68±2	24±2	1
PVC-Φ 27	110±2	68±2	27.5±2	1
PVC-Φ 32	110±2	70±2	32±2	1
PVC-Φ 34	130±2	68±2	34.5±2	1
*PVC-Φ 38	120±2	75±2	38±2	1.2
PVC-Φ 41	132±2	79±2	41±2	1.2
*PVC-Φ 48	135±2	88±2	48±2	1.5
PVC-Φ 50	150±2	88±2	50±2	1.2
*PVC-Φ 52	165±2	95±2	52±2	1.5
PVC-Φ 59	170±2	97±2	59±2	1.2
PVC-Φ 72	175±2	97±2	72±2	1.2
PVC-Φ 90	175±2	106±2	90±2	1.2
PVC-Φ 95	190±2	125±2	95±2	1.7
PVC-Φ 105	190±2	115±2	105±2	1.8
PVC-Φ 108	215±2	125±2	108±2	2
PVC-Φ 128	235±2	140±2	128±2	2

通孔橡胶护套

Modified rubber sheath

材料：改性橡胶


温度：-40℃~100℃

说明：包裹并保护电缆接头

Material: Modified rubber

Temperature:- 40℃~100℃

Description: Wrap and protect cable gland

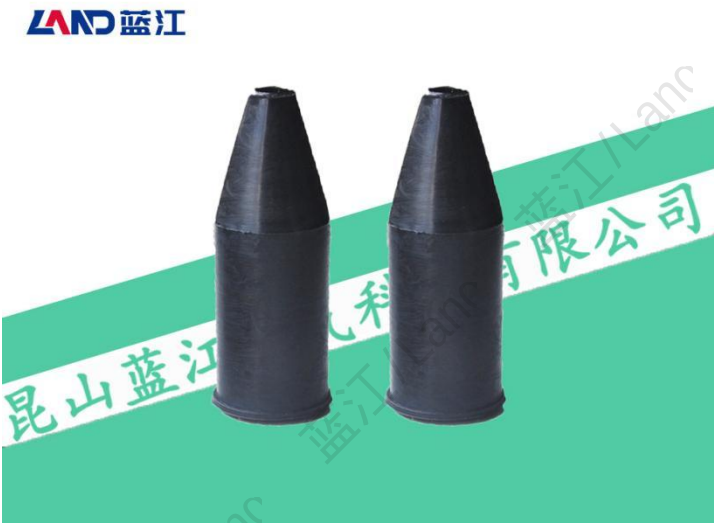

产品尺寸表

蓝江产品型号	产品尺寸/Product size			
Product model	总长度	接入长度	内径	厚度
PN.	L1 mm	L2 mm	Φ A mm	T mm
PVC-DN15	80±2	50±2	20±2	1
PVC-DN20	98±2	68±2	24±2	1
PVC-DN25	110±2	68±2	27.5±2	1
PVC-DN32	110±2	70±2	32±2	1
PVC-DN40	130±2	68±2	34.5±2	1
PVC-DN50	120±2	75±2	38±2	1.2

接地片

Grounding plate

材料：黄铜/黄铜镀镍


温度：-40℃~100℃

说明：用于电缆防水接头接地连接

Material: Brass/Nickel Plated Brass

Temperature:- 40℃~100℃

Description: Used for grounding connection of cable waterproof cable gland

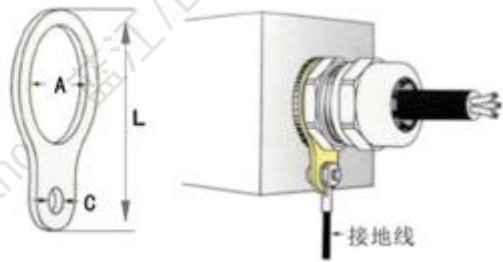

产品尺寸表

蓝江产品型号	产品尺寸/Product size			
Product model	大孔内径	小孔内径	产品长度	产品厚度
PN.	A	C	L	MM
JDP-M20	20.9	6.9	53.4	1
JDP-M25	25.9	6.9	59.4	1
JDP-M32	32.9	13	76.9	1.5
JDP-M40	40.9	14	88.6	1.5
JDP-M50	50.9	14	111	1.5
JDP-M63	63.9	14	128.4	1.5
JDP-M75	75.8	20	151.7	1.5
JDP-M90	91	20	182	1.5
JDP-M100	101.5	20	194	1.5